



**COMMERCIAL**

**Product catalogue  
2024**

**HETEROGENEOUS VINYL**

---



COMMERCIAL

“

We offer top-quality products,  
impeccable service,  
innovative, sustainable production  
and a proven track record...

But most of all,  
we love helping  
to achieve your goals.

## About IVC Commercial

IVC Commercial is focused on improving the productivity and wellbeing of users in spaces through innovative solutions that are easy to implement and affordable. IVC Commercial stands for responsibly designed and manufactured floors in Europe, with attention for a circular approach.

Unilin is a global leader in interior design and construction products, such as laminate flooring, luxury vinyl tiles, heterogeneous vinyl, engineered wood, carpet tiles, decorative panels, wall and roof systems and insulation boards. With more than 8000 employees in 105 locations across the globe constantly working on innovative solutions, we are proud to bring the newest technologies and materials into your projects.

For more information, contact [info@ivc-commercial.com](mailto:info@ivc-commercial.com) - [www.ivc-commercial.com](http://www.ivc-commercial.com).



Iperform 70 / Calais T34 - Styx T07



Heterogeneous Vinyl

## Summary

---

### Collection 2024

#### COMPACT

**08**  
IPERFORM 70

**20**  
TIRRENO 70

**22**  
TEMPO

**26**  
CENTRA 70

#### ACOUSTIC

**32**  
OPTIMISE 70

**42**  
SILENTO 50

**48**  
BATITEC

#### ACOUSTIC SEMI-LOOSE LAY/ LOOSE LAY

**56**  
BATIMAX PLUS

**60**  
NOMAD

#### TEXTILE SEMI-LOOSE LAY

**62**  
LOGITEX ULTIMATE 55

#### SAFETY

**66**  
ISAFE 70

---

**70**  
TECHNICAL INFO

**84**  
SUSTAINABILITY

---



NEW COLLECTION

# Iperform 70

## Compact Flooring

- 0.70 mm wear layer
- 2.15 mm total thickness
- Hyperguard+
- 2/4 m

- Class 34 Commercial Very Heavy
- Class 43 Light Industrial Heavy
- Glued installation


- **Sanitec**
- **Performance Barrier**

Coronet T94 / Toronto T91

### Iperform 70 / Compact Flooring




**Galibier T92**  
LRV 37 - 2/4 m  
PR: 99,5 x 100 cm




**Coronet T94**  
LRV 52 - 2/4 m  
PR: 99,5 x 100 cm




**Maira T56**  
LRV 66 - 2/4 m  
PR: 199 x 100 cm



**Maira T76**  
LRV 65 - 2/4 m  
PR: 199 x 100 cm



**Cevennes T94**  
LRV 48 - 2/4 m  
PR: 100 x 100 cm



**Cevennes T03**  
LRV 71 - 2/4 m  
PR: 100 x 100 cm



**Populo T93**  
LRV 41 - 2/4 m  
PR: 100 x 100 cm



**Gravel T92**  
LRV 31 - 2/4 m  
PR: 100 x 100 cm

Also available in Optimise 70.

Also available in Isafe 70.


LRV - Light Reflectance Value / PR - Pattern Repeat




Rochus T76 / Maira T76

Iperform 70 / Compact Flooring


			
			<b>Rochus T56</b>  ↑↓ LRV 48 - 2/4 m PR: 100 x 100 cm
			
<b>Rochus T66</b>  ↑↓ LRV 34 - 2/4 m PR: 100 x 100 cm	<b>Rochus T26</b>  ↑↓ LRV 43 - 2/4 m PR: 100 x 100 cm	<b>Rochus T76</b>  ↑↓ LRV 21 - PR: 100 x 100 cm	<b>Rochus T93</b>  ↑↓ LRV 47 - 2/4 m PR: 100 x 100 cm
			
<b>Rochus T97</b>  ↑↓ LRV 26 - 2/4 m PR: 100 x 100 cm	<b>Sand T31</b>  ↑↓ LRV 40 - 2/4 m PR: 100 x 100 cm	<b>Sand T62</b> ↑↓ LRV 36 - 2/4 m PR: 100 x 100 cm	<b>Sand T22</b> ↑↓ LRV 47 - 2/4 m PR: 100 x 100 cm
			
<b>Sand T23</b>  ↑↓ LRV 20 - 2/4 m PR: 100 x 100 cm	<b>Sand T72</b> ↑↓ LRV 22 - 2/4 m PR: 100 x 100 cm	<b>Sand T84</b> ↑↓ LRV 36 - 2/4 m PR: 100 x 100 cm	<b>Sand T97</b> ↑↓ LRV 17 - 2/4 m PR: 100 x 100 cm

 Also available in Optimise 70.

 Also available in Isafe 70.

LRV - Light Reflectance Value / PR - Pattern Repeat

Iperform 70 / Compact Flooring

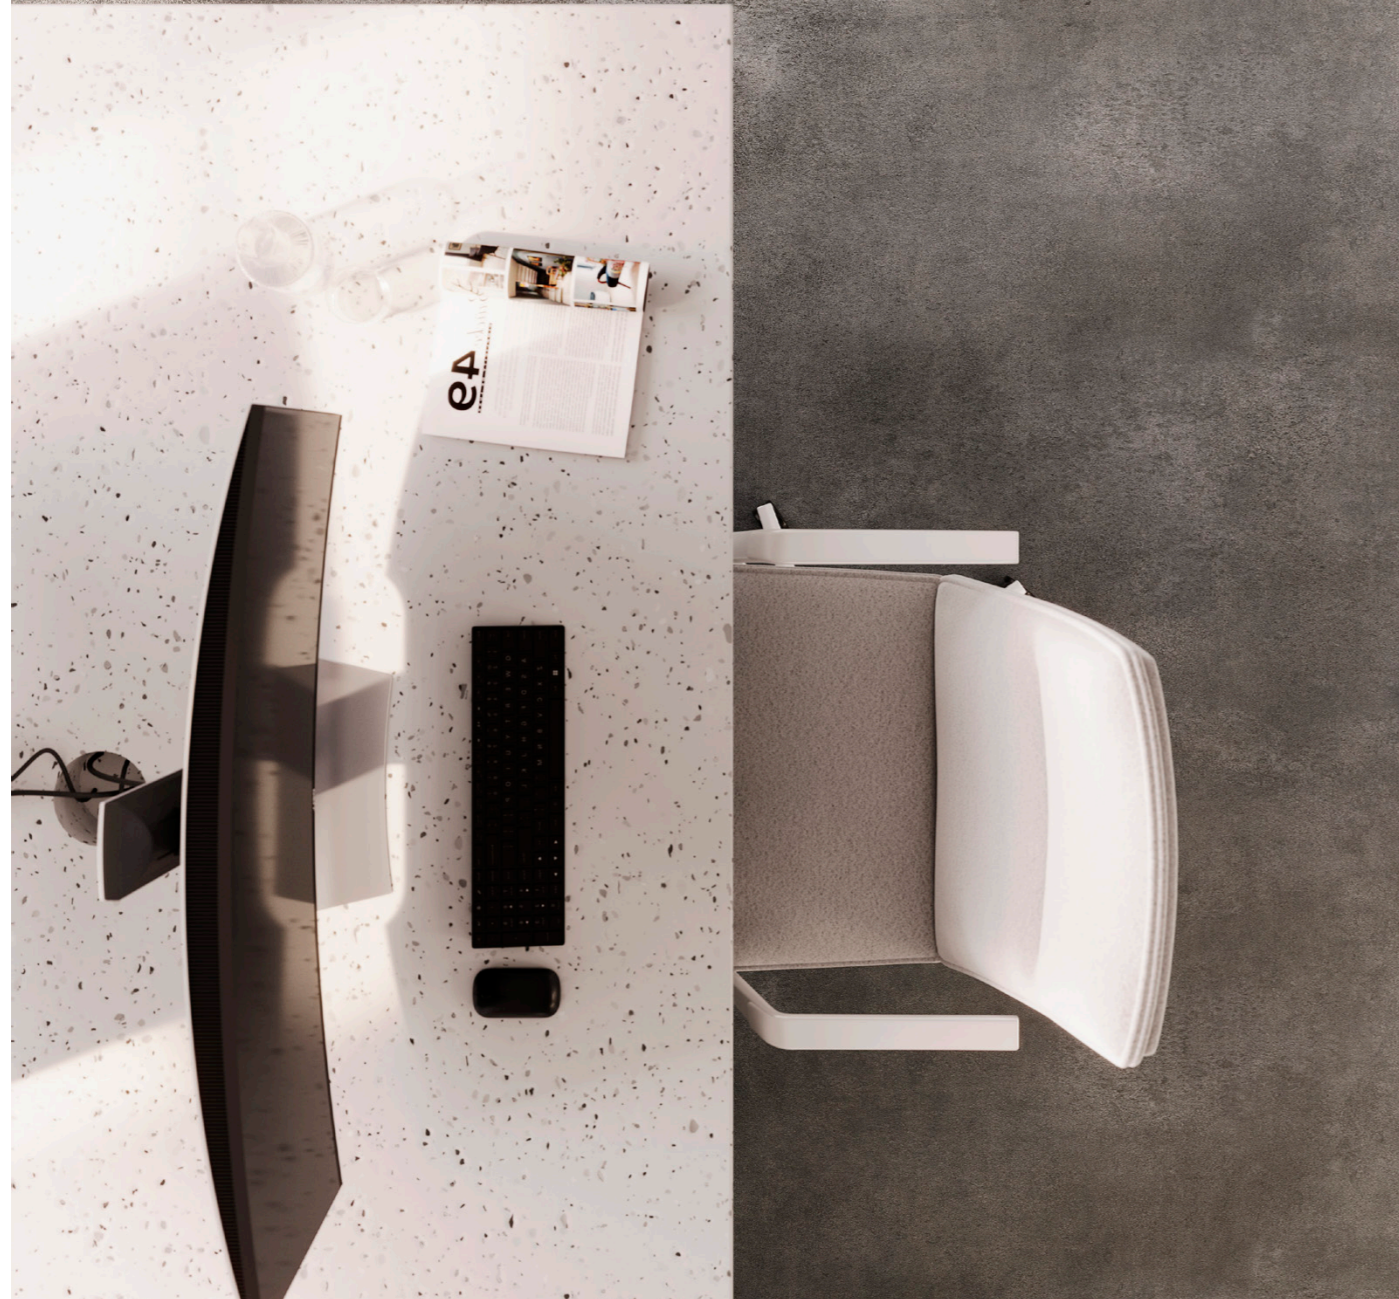

Noosa T95



**Noosa T95**  
LRV 20 - 2/4 m  
PR: 199 x 100 cm



**Noosa T92**  
LRV 23 - 2/4 m  
PR: 199 x 100 cm



**Noosa T98**  
LRV 16 - 2/4 m  
PR: 199 x 100 cm



**Styx T07**  
LRV 50 - 2/4 m  
PR: 199 x 100 cm



**Styx T39**  
LRV 35 - 2/4 m  
PR: 199 x 100 cm



**Styx T98**  
LRV 25 - 2/4 m  
PR: 199 x 100 cm




**Pinnacles T98**  
LRV 14 - 2/4 m  
PR: 100 x 100 cm



**Pinnacles T90**  
LRV 26 - 2/4 m  
PR: 100 x 100 cm



**Pinnacles T83**  
LRV 27 - 2/4 m  
PR: 100 x 100 cm



**Pinnacles T08**  
LRV 43 - 2/4 m  
PR: 100 x 100 cm


Also available in Optimise 70.

LRV - Light Reflectance Value / PR - Pattern Repeat

Iperform 70 / Compact Flooring



Noemi T04



**Noemi T04**  
LRV 49 - 2/4 m  
PR: 100 x 100 cm



**Noemi T35**  
LRV 29 - 2/4 m  
PR: 100 x 100 cm



**Noemi T91**  
LRV 31 - 2/4 m  
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat









Styx T07 / Calais T34


Iperform 70 / Compact Flooring





**Olympus T91**    
 LRV 30 - 2/4 m  
 PS: (4x25) x 150 cm  
 PR: 100 x 150 cm




**Olympus T33**    
 LRV 36 - 2/4 m  
 PS: (4x25) x 150 cm  
 PR: 100 x 150 cm




**Patagonia T34**   
 LRV 36 - 2/4 m  
 PS: 11,8 x 47,2 cm  
 PR: 199 x 100 cm




**Botticelli T88**   
 LRV 9 - 2/4 m  
 PS: 12,5 x 60 cm  
 PR: 100 x 120 cm





**Botticelli T82**   
 LRV 46 - 2/4 m  
 PS: 12,5 x 60 cm  
 PR: 100 x 120 cm




**Botticelli T93**   
 LRV 40 - 2/4 m  
 PS: 12,5 x 60 cm  
 PR: 100 x 120 cm





**Camargue T58**    
 LRV 30 - 2/4 m  
 PS: 10 cm x different lengths  
 PR: 100 x 120 cm





**Camargue T53**   
 LRV 48 - 2/4 m  
 PS: 10 cm x different lengths  
 PR: 100 x 120 cm





**Camargue T62**    
 LRV 34 - 2/4 m  
 PS: 10 cm x different lengths  
 PR: 100 x 120 cm




**Camargue T04**    
 LRV 29 - 2/4 m  
 PS: 10 cm x different lengths  
 PR: 100 x 120 cm




**Camargue T83**    
 LRV 24 - 2/4 m  
 PS: 10 cm x different lengths  
 PR: 100 x 120 cm



**Camargue T91**   
 LRV 15 - 2/4 m  
 PS: 10 cm x different lengths  
 PR: 100 x 120 cm

 Also available in Optimise 70.

 Also available in Isafe 70.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat



Tavel T30

Iperform 70 / Compact Flooring



**Calais T34**  
LRV 36 - 2/4 m  
PS: 20 x 120 cm  
PR: 100 x 120 cm



**Tavel T02**  
LRV 47 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T30**  
LRV 27 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T50**  
LRV 32 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T95**  
LRV 38 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Toronto T99**  
LRV 9 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Toronto T87**  
LRV 22 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Toronto T93**  
LRV 36 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Toronto T91**  
LRV 52 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Toronto T96**  
LRV 28 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Elias T93**  
LRV 29 - 2/4 m  
Groutless  
PR: 100 x 150 cm



**Elias T32**  
LRV 39 - 2/4 m  
Groutless  
PR: 100 x 150 cm



**Scarlet T90**  
LRV 17 - 2/4 m  
Groutless  
PR: 100 x 100 cm



**Scarlet T40**  
LRV 34 - 2/4 m  
Groutless  
PR: 100 x 100 cm

Also available in Optimise 70.

Also available in Isafe 70.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat

**Tirreno 70 / Compact Flooring**



○  
Carnival 934

**Tirreno 70**  
Compact Flooring

- 0.70 mm wear layer
- 2.00 mm total thickness
- Hyperguard+
- 2/3/4 m
- Class 34 Commercial Very Heavy
- Class 43 Light Industrial Heavy
- Glued installation
- Decorative chips



**Carnival 974**  
LRV 22 - 2/3/4 m  
PR: 100 x 100 cm



**Carnival 992**  
LRV 45 - 2/4 m  
PR: 100 x 100 cm



**Carnival 994**  
LRV 43 - 2/3/4 m  
PR: 100 x 100 cm



**Carnival 934**  
LRV 29 - 2/4 m  
PR: 100 x 100 cm




**Carnival 997**  
LRV 19 - 2/3/4 m  
PR: 100 x 100 cm



**Carnival 937**  
LRV 44 - 2/3/4 m  
PR: 100 x 100 cm



**Carnival 967**  
LRV 41 - 2/4 m  
PR: 100 x 100 cm



**Carnival 917**  
LRV 11 - 2/4 m  
PR: 100 x 100 cm



**Carnival 998**  
LRV 9 - 2/3/4 m  
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



# Tempo

Compact Flooring

- 0.50 mm wear layer
- 2.00 mm total thickness
- 2/3/4 m
- Class 23 Domestic Heavy
- Class 33 Commercial Heavy
- Glued installation
- Seamless V-grout
- Enhanced Surface Technology
- Supercompact Black backing

Oxley 695 / Cabral W34

## Tempo / Compact Flooring

			
<b>Parker Oak W33</b> LRV 34 - 2/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Brunel W33</b> LRV 35 - 2/3/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Parker Oak W93</b> LRV 39 - 2/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Cabral W37</b> LRV 34 - 2/4 m PS: 20 x 150 cm PR: 199 x 150 cm
			
<b>Parker Oak W31</b> LRV 32 - 2/3/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Cabral W34</b> LRV 37 - 2/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Brunel W44</b> LRV 30 - 2/3/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Chestnut Oak W84</b> LRV 15 - 2/4 m PS: 20 x 150 cm PR: 199 x 150 cm
			
<b>Chestnut Oak W30</b> LRV 33 - 2/3/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Chestnut Oak W62</b> LRV 20 - 2/3/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Chestnut Oak W35</b> LRV 29 - 2/4 m PS: 20 x 150 cm PR: 199 x 150 cm	<b>Parker Oak W44</b> LRV 11 - 2/3/4 m PS: 20 x 150 cm PR: 199 x 150 cm

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat



○  
Rosario Oak 694

Tempo / Compact Flooring



**Oslo W34**  
LRV 47 - 2/4 m  
PS: 20 x 150 cm  
PR: 199 x 150 cm



**Noble Oak W94**  
LRV 30 - 2/3/4 m  
PS: 20 x 150 cm  
PR: 199 x 150 cm



**Foxtail Pine W92**  
LRV 32 - 2/3/4 m  
PS: 20 x 150 cm  
PR: 99,5 x 150 cm



**Foxtail Pine W06**  
LRV 47 - 2/4 m  
PS: 20 x 150 cm  
PR: 99,5 x 150 cm



**Rosario Oak 631**  
LRV 36 - 2/3/4 m  
PS: 11,8 x 47,2 cm  
PR: 199 x 100 cm



**Noble Oak W32**  
LRV 34 - 2/3/4 m  
PS: 20 x 150 cm  
PR: 199 x 150 cm



**Rosario Oak 694**  
LRV 22 - 2/3/4 m  
PS: 11,8 x 47,2 cm  
PR: 199 x 100 cm



**Foxtail Pine W96**  
LRV 11 - 2/4 m  
PS: 20 x 150 cm  
PR: 99,5 x 150 cm




**Noble Oak W97**  
LRV 12 - 2/3/4 m  
PS: 20 x 150 cm  
PR: 199 x 150 cm




**Noble Oak W48**  
LRV 6 - 2/3/4 m  
PS: 20 x 150 cm  
PR: 199 x 150 cm




**Oxley 692**  
LRV 43 - 2/3/4 m  
PR: 99,5 x 100 cm



**Oxley 695**  
LRV 28 - 2/3/4 m  
PR: 99,5 x 100 cm



**Cappella 696**  
LRV 28 - 2/3/4 m  
PR: 99,5 x 100 cm



**Oxley 697**  
LRV 13 - 2/3/4 m  
PR: 99,5 x 100 cm

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat

















# Centra 70

## Compact Flooring

- 0.70 mm wear layer
- 2.00 mm total thickness
- Hyperguard+
- 2/3/4 m
- Class 34 Commercial Very Heavy
- Class 43 Light Industrial Heavy
- Budget collection
- Glued installation

Sedna T06

### Centra 70 / Compact Flooring

			
		<b>London Stone T30</b> LRV 37 - 2/3/4 m PR: 200 x 150 cm	<b>Sedna T06</b> LRV 61 - 2/3/4 m PR: 100 x 100 cm
			
<b>Sedna T32</b> LRV 49 - 2/3/4 m PR: 100 x 100 cm	<b>Sedna T36</b> LRV 45 - 2/3/4 m PR: 100 x 100 cm	<b>Sedna T14</b> LRV 32 - 2/3/4 m PR: 100 x 100 cm	<b>London Stone T68</b> LRV 21 - 2/3/4 m PR: 200 x 150 cm
			
<b>London Stone T95</b> LRV 37 - 2/3/4 m PR: 200 x 150 cm	<b>London Stone T93</b> LRV 38 - 2/3/4 m PR: 200 x 150 cm	<b>London Stone T94</b> LRV 22 - 2/3/4 m PR: 200 x 150 cm	<b>London Stone T96</b> LRV 10 - 2/3/4 m PR: 200 x 150 cm
			
<b>Sedna T92</b> LRV 48 - 2/3/4 m PR: 100 x 100 cm	<b>Sedna T94</b> LRV 23 - 2/3/4 m PR: 100 x 100 cm	<b>Sedna T75</b> LRV 17 - 2/3/4 m PR: 100 x 100 cm	<b>Sedna T99</b> LRV 13 - 2/3/4 m PR: 100 x 100 cm

LRV - Light Reflectance Value / PR - Pattern Repeat



○  
Camargue T51

Centra 70 / Compact Flooring

- |   |  |  |  |
|---|--|--|--|
|   |  |  |  |
| <p><b>Calais T30</b><br/>LRV 44 - 2/3/4 m<br/>PS: 20 x 120 cm<br/>PR: 100 x 120 cm</p>    | <p><b>Camargue T10</b><br/>LRV 40 - 2/3/4 m<br/>PS: 10 cm x different lengths<br/>PR: 100 x 120 cm</p> | <p><b>Camargue T51</b><br/>LRV 47 - 2/3/4 m<br/>PS: 10 cm x different lengths<br/>PR: 100 x 120 cm</p> | <p><b>Calais T34</b><br/>LRV 36 - 2/3/4 m<br/>PS: 20 x 120 cm<br/>PR: 100 x 120 cm</p>   |
|   |  |  |  |
| <p><b>Allure T45</b><br/>LRV 25 - 2/3/4 m<br/>PS: 16,6 x 120 cm<br/>PR: 99,5 x 120 cm</p> | <p><b>Camargue T52</b><br/>LRV 30 - 2/3/4 m<br/>PS: 10 cm x different lengths<br/>PR: 100 x 120 cm</p> | <p><b>Allure T18</b><br/>LRV 15 - 2/3/4 m<br/>PS: 16,6 x 120 cm<br/>PR: 99,5 x 120 cm</p>              | <p><b>Aspin T49</b><br/>LRV 21 - 2/3/4 m<br/>PS: 14,37 x 100 cm<br/>PR: 100 x 100 cm</p> |

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat

Centra 70 / Compact Flooring



Sedna T32 / Camargue T93



**Allure T05**  
LRV 45 - 2/3/4 m  
PS: 16,6 x 120 cm  
PR: 99,5 x 120 cm



**Allure T33**  
LRV 33 - 2/3/4 m  
PS: 16,6 x 120 cm  
PR: 99,5 x 120 cm



**Allure T43**  
LRV 19 - 2/3/4 m  
PS: 16,6 x 120 cm  
PR: 99,5 x 120 cm



**Camargue T93**  
LRV 30 - 2/3/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



**Sorbonne T97**  
LRV 19 - 2/3/4 m  
PS: 16,7 x 100 cm  
PR: 99,5 x 100 cm



**Chaparral Oak T98**  
LRV 22 - 2/3/4 m  
PS: 16,5 x 100 cm  
PR: 99,5 x 100 cm



**Allure T49**  
LRV 9 - 2/3/4 m  
PS: 16,6 x 120 cm  
PR: 99,5 x 120 cm



LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat





# Optimise 70

Acoustic Flooring


- 0.70 mm wear layer
- 3.40 mm total thickness
- Hyperguard+
- 2 m

- Class 34 Commercial Very Heavy
- Class 42 Industrial General
- 19 dB Sound reduction
- Glued installation


• Sanitec

Crystal T92 - T84 - T77 - T73


## Optimise 70 / Acoustic Flooring




**Crystal T73**  
LRV 45 - 2 m  
PR: 100 x 100 cm




**Crystal T77**  
LRV 28 - 2 m  
PR: 100 x 100 cm




**Crystal T84**  
LRV 22 - 2 m  
PR: 100 x 100 cm




**Crystal T24**  
LRV 46 - 2 m  
PR: 100 x 100 cm



**Crystal T54**  
LRV 55 - 2 m  
PR: 100 x 100 cm



**Crystal T64**  
LRV 39 - 2 m  
PR: 100 x 100 cm



**Crystal T14**  
LRV 33 - 2 m  
PR: 100 x 100 cm



**Crystal T34**  
LRV 43 - 2 m  
PR: 100 x 100 cm



**Crystal T92**  
LRV 56 - 2 m  
PR: 100 x 100 cm



**Crystal T94**  
LRV 45 - 2 m  
PR: 100 x 100 cm



**Crystal T96**  
LRV 17 - 2 m  
PR: 100 x 100 cm




LRV - Light Reflectance Value / PR - Pattern Repeat


Optimise 70 / Acoustic Flooring




Ombra T65 - T15 / Crystal T54 / Pinnacles T83




**Ombra T72**  
LRV 29 - 2m  
PR: 99,5 x 100 cm




**Ombra T75**  
LRV 15 - 2m  
PR: 99,5 x 100 cm




**Ombra T85**  
LRV 24 - 2m  
PR: 99,5 x 100 cm




**Ombra T20**  
LRV 37 - 2m  
PR: 99,5 x 100 cm



**Ombra T55**  
LRV 46 - 2m  
PR: 99,5 x 100 cm



**Ombra T65**  
LRV 27 - 2m  
PR: 99,5 x 100 cm




**Ombra T15**  
LRV 18 - 2m  
PR: 99,5 x 100 cm




**Ombra T35**  
LRV 29 - 2m  
PR: 99,5 x 100 cm



**Ombra T92**  
LRV 44 - 2m  
PR: 99,5 x 100 cm



**Ombra T95**  
LRV 31 - 2m  
PR: 99,5 x 100 cm



**Ombra T97**  
LRV 16 - 2m  
PR: 99,5 x 100 cm




LRV - Light Reflectance Value / PR - Pattern Repeat





Rochus T66 / Pinnacles T83 / Cevennes T03


Optimise 70 / Acoustic Flooring




**Rochus T74**  
LRV 35 - 2 m  
PR: 100 x 100 cm





**Rochus T76**   
LRV 21 - 2 m  
PR: 100 x 100 cm





**Rochus T86**  
LRV 28 - 2 m  
PR: 100 x 100 cm





**Rochus T26**   
LRV 43 - 2 m  
PR: 100 x 100 cm




**Rochus T56**   
LRV 50 - 2 m  
PR: 100 x 100 cm




**Rochus T66**   
LRV 35 - 2 m  
PR: 100 x 100 cm





**Rochus T16**  
LRV 16 - 2 m  
PR: 100 x 100 cm



**Rochus T36**  
LRV 36 - 2 m  
PR: 100 x 100 cm




**Rochus T93**   
LRV 49 - 2 m  
PR: 100 x 100 cm



**Rochus T96**  
LRV 36 - 2 m  
PR: 100 x 100 cm



**Rochus T97**   
LRV 27 - 2 m  
PR: 100 x 100 cm




 Also available in Iperform 70.



LRV - Light Reflectance Value / PR - Pattern Repeat

Optimise 70 / Acoustic Flooring





Cevennes T03 / Ombra T35 - T55






**Cevennes T03**    
LRV 69 - 2m  
PR: 100 x 100 cm




**Cevennes T91**   
LRV 41 - 2m  
PR: 100 x 100 cm





**Cevennes T94**    
LRV 45 - 2m  
PR: 100 x 100 cm




**Cevennes T97**   
LRV 24 - 2m  
PR: 100 x 100 cm



**Pinnacles T08**    
LRV 50 - 2m  
PR: 100 x 100 cm





**Pinnacles T91**   
LRV 38 - 2m  
PR: 100 x 100 cm



**Pinnacles T83**    
LRV 28 - 2m  
PR: 100 x 100 cm



**Pinnacles T98**    
LRV 14 - 2m  
PR: 100 x 100 cm

 Also available in Iperform 70.

LRV - Light Reflectance Value / PR - Pattern Repeat

Optimise 70 / Acoustic Flooring



Crystal T84 / Ombra T72 / Elias T93

			
			<b>Elias T32</b>  ↑↑ LRV 38 - 2 m Groutless PR: 100 x 150 cm
			
<b>Toronto T81</b>  ↑↑ LRV 29 - 2 m PS: 16,7 x 100 cm PR: 100 x 100 cm	<b>Camargue T33</b>  ↑↑ LRV 26 - 2 m PS: 10 cm x different lengths PR: 100 x 120 cm	<b>Olympus T33</b>  ↑↑ LRV 36 - 2 m PS: (4x25) x 150 cm PR: 100 x 150 cm	<b>Elias T93</b>  ↑↑ LRV 32 - 2 m Groutless PR: 100 x 150 cm
			
<b>Camargue T04</b>  ↑↑ LRV 36 - 2 m PS: 10 cm x different lengths PR: 100 x 120 cm	<b>Toronto T91</b>  ↑↑ LRV 52 - 2 m PS: 16,7 x 100 cm PR: 100 x 100 cm	<b>Olympus T91</b>  ↑↑ LRV 33 - 2 m PS: (4x25) x 150 cm PR: 100 x 150 cm	<b>Toronto T93</b>  ↑↑ LRV 36 - 2 m PS: 16,7 x 100 cm PR: 100 x 100 cm
			
<b>Camargue T62</b>  ↑↑ LRV 34 - 2 m PS: 10 cm x different lengths PR: 100 x 120 cm	<b>Camargue T83</b>  ↑↑ LRV 24 - 2 m PS: 10 cm x different lengths PR: 100 x 120 cm	<b>Toronto T87</b>  ↑↑ LRV 22 - 2 m PS: 16,7 x 100 cm PR: 100 x 100 cm	<b>Camargue T89</b>  ↑↑ LRV 20 - 2 m PS: 10 cm x different lengths PR: 100 x 120 cm

 Also available in Iperform 70.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat



# Silento 50

## Acoustic Flooring


- 0.50 mm wear layer
- 3.00 mm total thickness
- Hyperguard+
- 2/4 m

- Class 23 Domestic Heavy
- Class 33 Commercial Heavy
- 18 dB Sound reduction
- Budget collection

- Glued installation

Salzburg T91


### Silento 50 / Acoustic Flooring



**Cappella T09\***  
LRV 53 -  
PR: 99,5 x 100 cm



**Salzburg T03**  
LRV 50 - 2/4 m  
PR: 100 x 100 cm



**Papilio T32\***  
LRV 52 - 2/4 m  
PR: 100 x 100 cm




**Max T16\***  
LRV 24 - 2/4 m  
PR: 199 x 150 cm



**Max T76**  
LRV 21 - 2/4 m  
PR: 199 x 150 cm




**Salzburg T94**  
LRV 39 - 2/4 m  
PR: 100 x 100 cm



**Papilio T91**  
LRV 40 - 2/4 m  
PR: 100 x 100 cm



**Camelia T94**  
LRV 39 - 2/4 m  
PR: 100 x 100 cm




**Salzburg T90**  
LRV 34 - 2/4 m  
PR: 100 x 100 cm



**Max T93\***  
LRV 45 - 2/4 m  
PR: 199 x 150 cm



**Max T96**  
LRV 39 - 2/4 m  
PR: 199 x 150 cm



**Salzburg T91**  
LRV 22 - 2/4 m  
PR: 100 x 100 cm



**Salzburg T98**  
LRV 11 - 2/4 m  
PR: 100 x 100 cm



\* I'm leaving the collection.

LRV - Light Reflectance Value / PR - Pattern Repeat


Silento 50 / Acoustic Flooring



Patagonia T94



**Camargue T53**  
LRV 48 - 2/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



**Tavel T02**  
LRV 52 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Botticelli T07**  
LRV 51 - 2/4 m  
PS: 12,5 x 60 cm  
PR: 100 x 120 cm



**Botticelli T93**  
LRV 38 - 2/4 m  
PS: 12,5 x 60 cm  
PR: 100 x 120 cm



**Alba T02\***  
LRV 48 - 2/4 m  
PS: 10 x 100 cm  
PR: 100 x 100 cm



**Camargue T79**  
LRV 40 - 2/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



**Toronto T11**  
LRV 21 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Patagonia T94\***  
LRV 22 - 2/4 m  
PS: 11,8 x 47,2 cm  
PR: 199 x 100 cm



\* I'm leaving the collection.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat

Silento 50 / Acoustic Flooring



Tavel T31



**Burgos T30**  
LRV 42 - 2/4 m  
PS: 11,11 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T50**  
LRV 29 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Monte Carlo T62**  
LRV 33 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T31**  
LRV 27 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Toronto T10**  
LRV 40 - 2/4 m  
PS: 16,7 x 100 cm  
PR: 100 x 100 cm



**Aspin T37**  
LRV 40 - 2/4 m  
PS: 14,37 x 100 cm  
PR: 100 x 100 cm



**Calais T39**  
LRV 19 - 2/4 m  
PS: 20 x 120 cm  
PR: 100 x 120 cm



**Pécan D T48\***  
LRV 10 - 2/4 m  
PS: 10 x 100 cm  
PR: 100 x 100 cm

\* I'm leaving the collection.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat





UPDATE IN 2024

○  
Elias T48

# Batitec

Acoustic Flooring

- 0.35 mm wear layer
- 2.75 mm total thickness
- Hyperguard+
- 2/3/4 m

- Class 23 Domestic Heavy
- Class 31 Commercial Moderate
- Budget collection

- **20 dB Sound reduction**
- **Glued & semi-looselay installation**
- **Social housing segment**




**Elias T48**  
LRV 22 - 2 m  
Groutless  
PR: 100 x 150 cm



**Burned Wood T94**  
LRV 28 - 2/3/4 m  
PS: 20 x 120 cm  
PR: 99,5 x 120 cm



**Nomad T38**  
LRV 35 - 2/4 m  
PS: 10 x 120 cm  
PR: 99,5 x 120 cm



**Sintra T45**  
LRV 42 - 2/3/4 m  
PS: 7,8 x 23,5 cm  
PR: 99,5 x 100 cm



**Camargue T27**  
LRV 50 - 2/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



**Camargue T29**  
LRV 35 - 2/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



**Camargue T46**  
LRV 43 - 2/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



**Camargue T53**  
LRV 57 - 2/4 m  
PS: 10 cm x different lengths  
PR: 100 x 120 cm



LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat


Batitec / Acoustic Flooring



Tavel T31



**Cognac T91\***  
LRV 48 - 2/3/4 m  
PS: 10 x 60 cm  
PR: 99,5 x 120 cm



**Tavel T08**  
LRV 56 - 2/3/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T31**  
LRV 22 - 2/3/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T33**  
LRV 44 - 2/3/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T81**  
LRV 41 - 2/3/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Aspin T34**  
LRV 25 - 2/4 m  
PS: 14,37 x 100 cm  
PR: 100 x 100 cm



**Botticelli T07**  
LRV 63 - 2/4 m  
PS: 12,5 x 60 cm  
PR: 100 x 120 cm



**Botticelli T93**  
LRV 40 - 2/3/4 m  
PS: 12,5 x 60 cm  
PR: 100 x 120 cm



**Noblesse T92**  
LRV 30 - 2/4 m  
PS: 10 x 100 cm  
PR: 100 x 100 cm



\* I'm leaving the collection.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat

Batitec / Acoustic Flooring



○  
Styx T39



**Styx T07**  
LRV 60 - 2/4 m  
PR: 199 x 100 cm



**Styx T39**  
LRV 44 - 2/3/4 m  
PR: 199 x 100 cm



**Styx T98**  
LRV 34 - 2/3/4 m  
PR: 199 x 100 cm



**Cyclone T15\***  
LRV 22 - 2/4 m  
PR: 99,5 x 100 cm



**Cyclone T75\***  
LRV 17 - 2/4 m  
PR: 99,5 x 100 cm



**Cyclone T90\***  
LRV 34 - 2/4 m  
PR: 99,5 x 100 cm



**Cyclone T95**  
LRV 27 - 2/4 m  
PR: 99,5 x 100 cm



**Cyclone T96\***  
LRV 18 - 2/4 m  
PR: 99,5 x 100 cm



\* I'm leaving the collection.

LRV - Light Reflectance Value / PR - Pattern Repeat

Batitec / Acoustic Flooring




Evora T05 / Cyclone T90




**Evora T05\***  
LRV 55 - 2/4 m  
TS: 20 x 20 cm  
PR: 99,5 x 100 cm




**Pompei D T10\***  
LRV 49 - 2/4 m  
TS: 16,7 x 16,7 cm  
PR: 100 x 100 cm



**Cosmos T09**  
LRV 56 - 2/3/4 m  
PR: 100 x 100 cm



**Cosmos T32\***  
LRV 50 - 2/4 m  
PR: 100 x 100 cm



**Cosmos T71**  
LRV 43 - 2/3/4 m  
PR: 100 x 100 cm



**Cosmos T90\***  
LRV 31 - 2/3/4 m  
PR: 100 x 100 cm



**Cosmos T91**  
LRV 29 - 2/3/4 m  
PR: 100 x 100 cm



**Cosmos T95**  
LRV 17 - 2/3/4 m  
PR: 100 x 100 cm



**Raffia T94\***  
LRV 21 - 2/4 m  
PR: 100 x 100 cm

\* I'm leaving the collection.

LRV - Light Reflectance Value / PR - Pattern Repeat



# Batimax Plus

Acoustic Semi-Loose Lay Flooring

- 0.53 mm wear layer
- 3.20 mm total thickness
- Hyperguard+
- 2 m

- Class 23 Domestic Heavy
- Class 33 Commercial Heavy
- 20 dB Sound reduction

- **Semi-Loose Lay installation**
- **No glue for easy and clean installation**
- **Renovation solution**

Tavel T33

Batimax Plus / Acoustic Semi-Loose Lay Flooring



**Burned Wood T94**  
LRV 28 - 2 m  
PS: 20 x 120 cm  
PR: 99,5 x 120 cm



**Tavel T33**  
LRV 44 - 2 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T75**  
LRV 35 - 2 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Tavel T76**  
LRV 50 - 2 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 100 cm



**Stockholm T37**  
LRV 52 - 2 m  
PS: 16,6 x 120 cm  
PR: 99,5 x 120 cm



**Stockholm T95**  
LRV 39 - 2 m  
PS: 16,6 x 120 cm  
PR: 99,5 x 120 cm

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat

**Batimax Plus** / Acoustic Semi-Loose Lay Flooring



○  
Styx T98



**Cosmos T91**  
LRV 29 - 2m  
PR: 100 x 100 cm



**Cosmos T95**  
LRV 17 - 2m  
PR: 100 x 100 cm



**Styx T07**  
LRV 54 - 2m  
PR: 199 x 100 cm



**Styx T35**  
LRV 51 - 2m  
PR: 199 x 100 cm



**Styx T39**  
LRV 45 - 2m  
PR: 199 x 100 cm



**Styx T98**  
LRV 29 - 2m  
PR: 199 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



# Nomad

## Loose Lay Flooring

- 0.45 mm wear layer
- 3.90 mm total thickness
- Hyperguard+
- 2/4 m







- Class 23 Domestic Heavy
- Class 32 Commercial General
- 20 dB Sound reduction

- **Loose Lay installation**
- **Renovation solution**
- **No glue for easy and clean installation**

Tavel T08

### Nomad / Acoustic Loose Lay Flooring



			
<b>Oxley T81</b> LRV 39 - 2/4 m PR: 99,5 x 100 cm	<b>London Stone T92</b> LRV 35 - 2/4 m PR: 200 x 150 cm	<b>London Stone T97</b> LRV 23 - 2/4 m PR: 200 x 150 cm	<b>Oxley T97</b> LRV 16 - 2/4 m PR: 99,5 x 100 cm
			
<b>Tavel T08</b> LRV 55 - 2/4 m PS: 12,5 x 100 cm PR: 99,5 x 100 cm	<b>Toronto T66</b> LRV 32 - 2/4 m PS: 16,7 x 100 cm PR: 100 x 100 cm	<b>Tavel T45</b> LRV 33 - 2/4 m PS: 12,5 x 100 cm PR: 99,5 x 100 cm	<b>Botticelli T35</b> LRV 37 - 2/4 m PS: 12,5 x 60 cm PR: 100 x 120 cm

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat



○ Elias T47  
↑↑

# Logitex Ultimate 55

Acoustic Semi-Loose Lay Flooring

- 0.55 mm wear layer
- 3.20 mm total thickness
- Hyperguard+
- 2/4 m
- Class 23 Domestic Heavy
- Class 33 Commercial Heavy
- Class 42 Light Industrial General

- 19 dB Sound reduction
- Semi-Loose Lay installation with tape
- Textile backing



**Elias T93**  
LRV 32 - 2/4 m  
Groutless  
PR: 100 x 150 cm



**Elias T47**  
LRV 38 - 2/4 m  
Groutless  
PR: 100 x 150 cm



**Elias T32**  
LRV 52 - 2/4 m  
Groutless  
PR: 100 x 150 cm



**Elias T44**  
LRV 22 - 2/4 m  
Groutless  
PR: 100 x 150 cm



**Patagonia T34**  
LRV 37 - 2/4 m  
PS: 11,8 x 47,2 cm  
PR: 199 x 100 cm



**Toronto T13**  
LRV 46 - 2/4 m  
PS: 16,6 x 100 cm  
PR: 100 x 100 cm



**Stockholm T95**  
LRV 29 - 2/4 m  
PS: 16,7 x 120 cm  
PR: 99,5 x 120 cm



**Stockholm T37**  
LRV 23 - 2/4 m  
PS: 16,7 x 120 cm  
PR: 99,5 x 120 cm



**Stockholm T42**  
LRV 36 - 2/4 m  
PS: 16,7 x 120 cm  
PR: 99,5 x 120 cm



**Tavel T81**  
LRV 41 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 120 cm



**Tavel T33**  
LRV 56 - 2/4 m  
PS: 12,5 x 100 cm  
PR: 99,5 x 120 cm


LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat




Logitex Ultimate 55 / Semi-Loose Lay Textile Flooring




Gravel T36



**Aveiro T76**  
LRV 41 - 2/4 m  
TS: 20 x 20 cm  
PR: 99,5 x 100 cm



**Coronet T35**  
LRV 44 - 2/4 m  
PR: 99,5 x 100 cm



**Cosmos T09**  
LRV 34 - 2/4 m  
PR: 100 x 100 cm



**Cosmos T91**  
LRV 39 - 2/4 m  
PR: 100 x 100 cm



**Evora T93**  
LRV 30 - 2/4 m  
TS: 20 x 20 cm  
PR: 99,5 x 100 cm



**Gravel T96**  
LRV 34 - 2/4 m  
PR: 100 x 100 cm



**Gravel T36**  
LRV 27 - 2/4 m  
PR: 100 x 100 cm



**Sting T15**  
LRV 64 - 2/4 m  
PR: 199 x 100 cm



**Sting T75**  
LRV 55 - 2/4 m  
PR: 190 x 100 cm



**Sting T97**  
LRV 21 - 2/4 m  
PR: 190 x 100 cm



**Sting T95**  
LRV 29 - 2/4 m  
PR: 190 x 100 cm

LRV - Light Reflectance Value / TS - Tile size / PR - Pattern Repeat



Coronet T94 / Sand T94

# Isafe 70

## Safety Flooring

- 0.70 mm wear layer
- 2.00 mm total thickness
- RRL 36+ Low Potential for Slip
- 2 m

- Class 34 Commercial Very Heavy
- Class 43 Heavy Industrial
- Glued installation

- **R12 Slip Resistance**
- **Sanitec**
- **HyperGrip**

### Isafe 70 / Safety Flooring

			
		<b>Sand 599</b> LRV 5 - 2 m PR: 100 x 100 cm	<b>Sand 597</b> LRV 16 - 2 m PR: 100 x 100 cm
			
<b>Sand 594</b> LRV 29 - 2 m PR: 100 x 100 cm	<b>Sand 531</b>  LRV 42 - 2 m PR: 100 x 100 cm	<b>Sand 577</b> LRV 6 - 2 m PR: 100 x 100 cm	<b>Sand 523</b>  LRV 19 - 2 m PR: 100 x 100 cm
			
<b>Padua 593</b> LRV 20 - 2 m PR: 99,5 x 100 cm	<b>Padua 529</b> LRV 15 - 2 m PR: 99,5 x 100 cm	<b>Padua 565</b> LRV 21 - 2 m PR: 99,5 x 100 cm	<b>Padua 579</b> LRV 16 - 2 m PR: 99,5 x 100 cm
			
<b>Sting 539</b> LRV 41 - 2 m PR: 199 x 100 cm	<b>Sting 583</b> LRV 31 - 2 m PR: 199 x 100 cm	<b>Bolivia 599</b> LRV 8 - 2 m PR: 100 x 100 cm	<b>Coronet 594</b>  LRV 57 - 2 m PR: 99,5 x 100 cm



 Also available in Iperform 70.

LRV - Light Reflectance Value / PR - Pattern Repeat



Monte Carlo 532 / Stockholm 595

Isafe 70 / Safety Flooring

- |  |  |  |   |
|--|--|--|---|
|   |   |   |    |
| <p><b>Camargue 558</b>  ↑↑<br/>         LRV 30 - 2 m<br/>         PS: 10 cm x different lengths<br/>         PR: 100 x 120 cm</p> | <p><b>Monte Carlo 593</b> ↑↑<br/>         LRV 22 - 2 m<br/>         PS: 12,5 x 100 cm<br/>         PR: 99,5 x 100 cm</p>   | <p><b>Monte Carlo 532</b> ↑↑<br/>         LRV 38 - 2 m<br/>         PS: 12,5 x 100 cm<br/>         PR: 99,5 x 100 cm</p>   | <p><b>Monte Carlo 538</b> ↑↑<br/>         LRV 20 - 2 m<br/>         PS: 12,5 x 100 cm<br/>         PR: 99,5 x 100 cm</p>  |
|   |   |   |    |
| <p><b>Noblesse 589</b> ↑↑<br/>         LRV 10 - 2 m<br/>         PS: 10 x 100 cm<br/>         PR: 100 x 100 cm</p>   | <p><b>Noblesse 593</b> ↑↑<br/>         LRV 30 - 2 m<br/>         PS: 10 x 100 cm<br/>         PR: 100 x 100 cm</p>   | <p><b>Patagonia 544</b> ↑↑<br/>         LRV 16 - 2 m<br/>         PS: 11,8 x 47,2 cm<br/>         PR: 199 x 100 cm</p>   | <p><b>Patagonia 595</b> ↑↑<br/>         LRV 39 - 2 m<br/>         PS: 11,8 x 47,2 cm<br/>         PR: 199 x 100 cm</p>  |
|   |   |   |    |
| <p><b>Stockholm 595</b> ↑↑<br/>         LRV 43 - 2 m<br/>         PS: 16,6 x 120 cm<br/>         PR: 99,5 x 120 cm</p>   | <p><b>Tavel 530</b>  ↑↑<br/>         LRV 30 - 2 m<br/>         PS: 12,5 x 100 cm<br/>         PR: 99,5 x 100 cm</p> | <p><b>Tavel 595</b>  ↑↑<br/>         LRV 39 - 2 m<br/>         PS: 12,5 x 100 cm<br/>         PR: 99,5 x 100 cm</p> | <p><b>Toronto 596</b>  ↑↑<br/>         LRV 28 - 2 m<br/>         PS: 16,7 x 100 cm<br/>         PR: 100 x 100 cm</p> |

 Also available in Iperform 70.

LRV - Light Reflectance Value / PS - Plank size / PR - Pattern Repeat



**General and technical  
information**


TECHNICAL INFO

# Hot welding

Ø 4 mm x 100 m length

IVC Commercial offers a wide range of welding rods. Join your Heterogeneous Vinyl into a colour-matched welding, or create a contrasting weld. Either way will result in for a flooring solution that is strong and beautiful. Warranted by IVC Commercial.

A large offer of matching welding rod colours are available on demand.

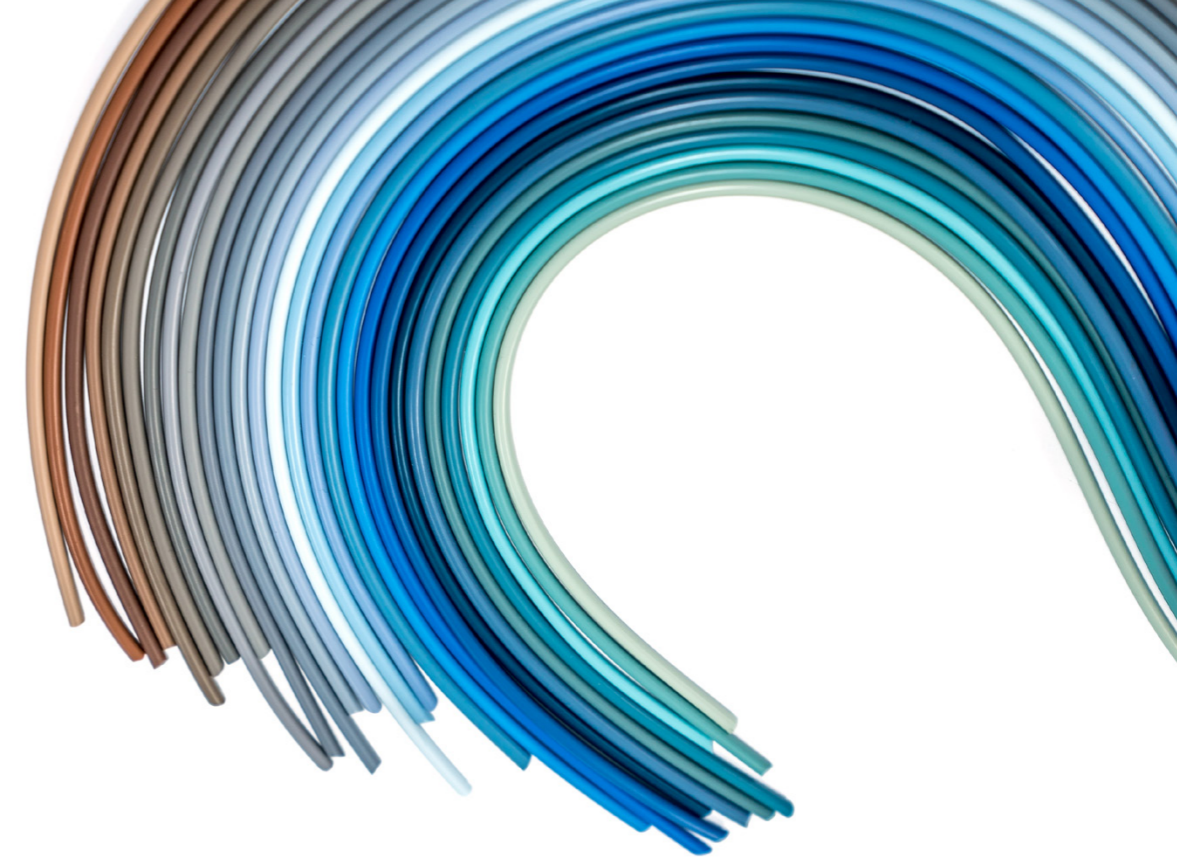

## Tools



## Steps



Contrasting welding

Colour-matched welding

Colour-matched welding

This is only a summary of the full installation instructions. Please check our website: [ivc-commercial.com](http://ivc-commercial.com) for more details.



TECHNICAL INFO

## Cold welding: Invisiweld

Invisiweld technology gives the ability to achieve **an almost imperceptible joint** with all IVC Commercial Heterogeneous Vinyl floor coverings. Fast, clean and easy to use, Invisiweld is economical and leaves a seamless, strong and watertight join.



Werner Müller cold welding offers you 3 main advantages

### 1. "The legendary needle"

A metal needle firmly fixed on the tube. It guarantees simple and safe use.

### 2. The strength of the weld

A very strong weld - exceeding by far the values of European standards. Tested, confirmed and documented.

### 3. Health protection

Does not harm health. Proven by tests carried out by an independent, specialist institute.

## Steps



Invisiweld

Invisiweld

This is only a summary of the full installation instructions. Please check our website: [installandclean.com](https://www.installandclean.com) for more details.



TECHNICAL INFO

## Adhesives



### Loose Lay Tape

100 mm x 50 m (343915)

With this specialised tape, your (semi-) Loose Lay Heterogeneous Vinyl floor is guaranteed to stand its ground, while remaining easy to remove and replace. The tape guarantees 100% (semi-) Loose Lay vinyl floor installation. Warranted by IVC Commercial.

Applicable for Batitec, Batimax Plus, Logitex Ultimate 55 and Nomad.

TECHNICAL INFO

## Entrance mats




### Step Up

60,96 cm x 60,96 cm x 0,9 cm

Step Up is available in four neutral yet captivating shades (400063888, 400063887, 400063886 and 400063885) that set the tone for whatever striking interior lies beyond the entrance. As a buffer between the outdoors and the inside, Step Up catches up to 80% of all incoming dirt, resulting in beautiful, flawless Heterogeneous Vinyl flooring throughout the rest of the building.


# Quality

Always on the way to keep the quality of our products on a high and consistent level, we manage in house different quality tests.

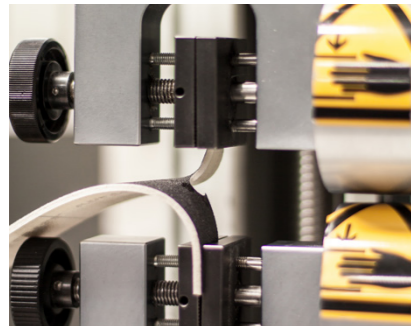

### Tear test

The force required to tear a vinyl floor. This force is measured in Newtons. The various European or international standards provide for a variety of specific methods.

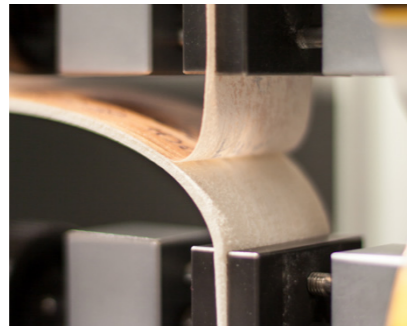

### Delamination test

The delamination test is used to test the adhesion between the various layers. It measures the force required to separate the layers from each other. This may apply to the wear layer, the intermediate layer, or to the backing.



### Indentation test

This test measures the residual indentation and elasticity of the vinyl: the extent to which the vinyl floor recovers its original shape after being exposed to a force of 50 kg/cm<sup>2</sup> for 2.5 hours.




### Wheelchair test

This procedure determines changes in the appearance and the stability of resilient floor coverings, under the movement of a wheel chair (25,000 to 50,000 revolutions). The wear of each quality is measured and evaluated in this manner.




### Dimensional stability and curling

This examines the degree of curling, shrinkage or expansion of vinyl floorings. During this procedure, the product is heated at 80°C for 6 hours, after which it is acclimatised at room temperature for a certain period.

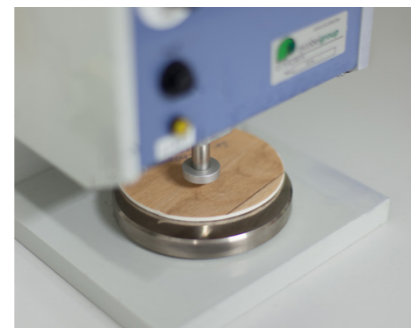

### Thickness

The thickness of the vinyl flooring is measured to verify compliance with European laws.

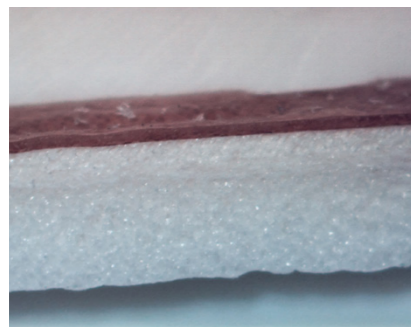

### Wear layer

Microscopy is used to measure the exact thickness of the individual wear layer.




### Furniture leg test


Three types of furniture legs are used for this purpose. We mechanically drag the furniture leg over the vinyl with a pressure of 100 kg to assess the extent of damage caused to the vinyl coating. This is done in the longitudinal as well as the transverse direction.

# Technology


### Compact Flooring EN ISO 10582

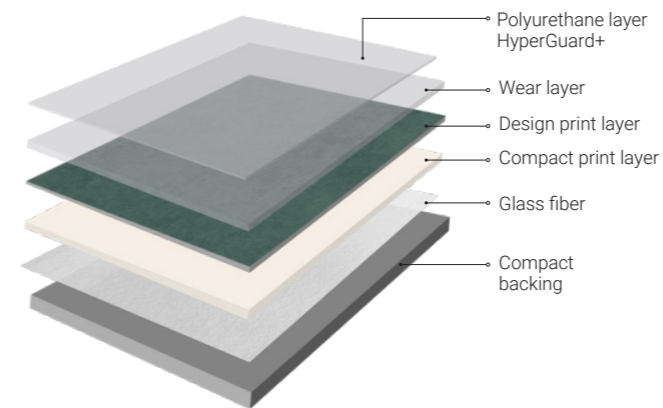


### Acoustic Flooring EN ISO 11638

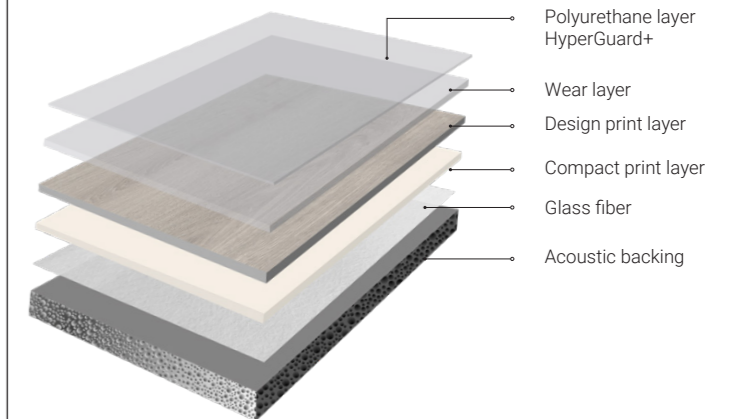


### Loose Lay Flooring EN ISO 11638 - Nomad collection

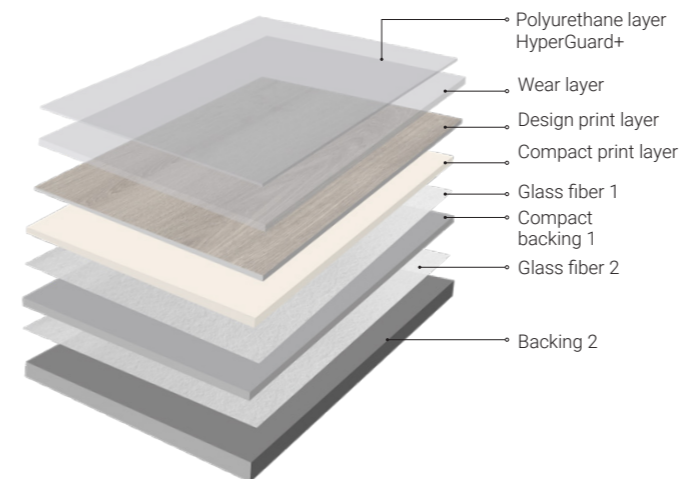

### Semi-Loose Lay Flooring EN 650 - Textile Backing

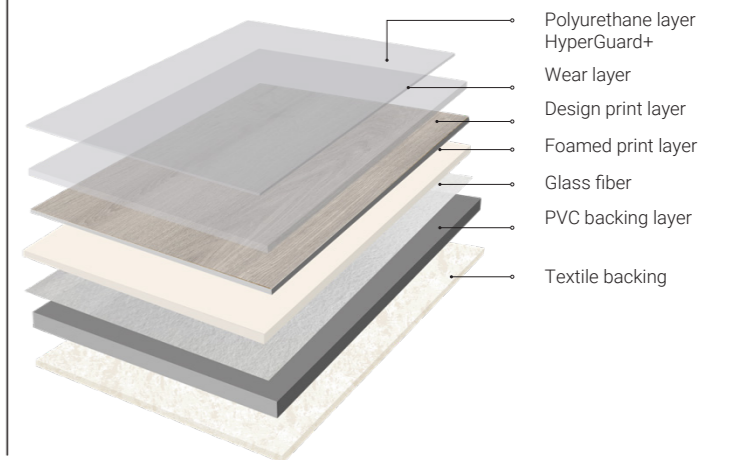

### Safety Flooring EN ISO 10582 / 13845

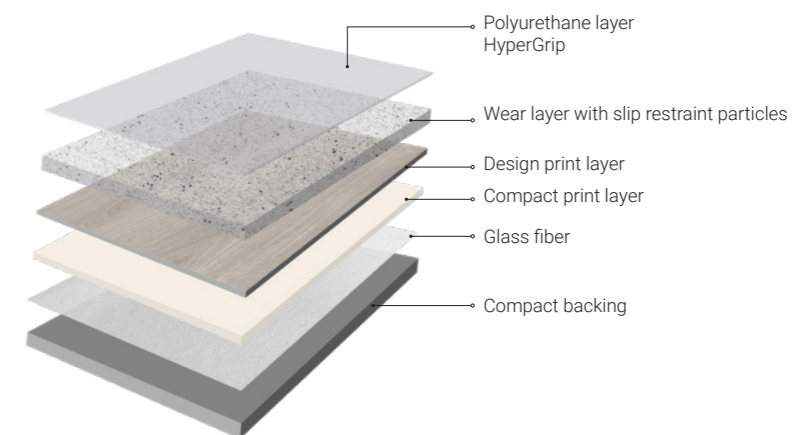



# Order your free samples


Would you like to see and feel our vinyl floors yourself? Order up to **7 free samples** of your favourite floors and discover which floor suits your project perfectly.

## Order samples in 3 easy steps

1. Choose up to 7 floor samples by simply clicking 'ADD TO CARD'.
2. Then go to your shopping cart at the top right of the page.
3. Sure of your choice? Click 'PROCEED' to enter your address details and complete your free order.



Simply select the floor you like and add it to your cart to order free samples.  
[ivc-commercial.com](http://ivc-commercial.com)

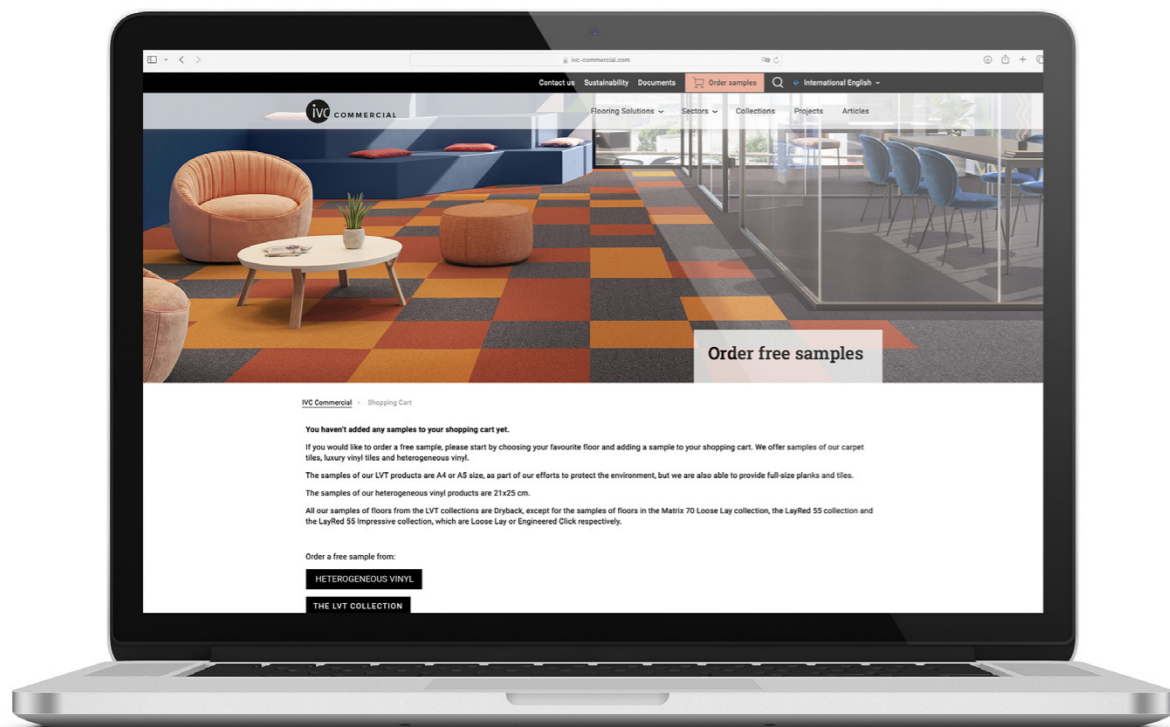

# Installation & maintenance


To help you implement its high-quality products, IVC Commercial offers you a tailor-made service. For each category of installation type, we provide you with an installation guide containing all necessary information for proper installation, cleaning and maintenance.

## Installation direction

Always follow the installation instructions about direction:

**REVERSE (B) ↓↑**  
**DO NOT REVERSE (A) ↑↑**

L= Left, R= Right



Consult and download our guides on our website  
[www.installandclean.com/en/ivc/heterogeneous-vinyl](http://www.installandclean.com/en/ivc/heterogeneous-vinyl)



# Groutless design




## “Endless wood for easy installation”


Wood design with a unique trick up its sleeve.

An all-over wood pattern is not only beautiful to look at, but easy to install, just unroll for a great looking floor in no time at all. The visual absence of a plank size boundary allows for fitting just as quickly as a uni-design. Reducing installation waste, it also makes groutless design a cost-effective and responsible choice.


### Effortless installation



Quick installation



Cost-effective



Less cutting waste



Elias T32

Scarlet T40



Scarlet T90



**Our sustainability  
journey**



SUSTAINABILITY STRATEGY

## One Home



"At Unilin, we push boundaries to improve people's quality of life by creating better spaces"

# ONEHOME

In 2022 Unilin launched One Home, our group-wide sustainability strategy with ambitious targets in several domains. We look into the environmental impact of our products and production processes, but also at how we live at home, at work and on our planet.

### PLANET HOME

Greenhouse gas emissions must be reduced or even completely eliminated. This is a major challenge for the manufacturing industry, as we still too often burn fossil fuels and end-of-life products. We need to switch to circularity, using renewable or recycled materials and making recyclable products.

### YOUR HOME

A healthy, comfortable and sustainable living environment is more important than ever. The products we make must provide added value to our customers, without compromising on health, comfort or sustainability.

### OUR HOME


Our company is a second home for more than 8,000 employees. We aim to create a positive, stimulating and safe working environment where they feel good and valued; an environment where everyone can challenge himself and continue to grow. Our community, municipalities and neighbours also form a significant part of our story.



# Smart use of renewable energy

## Sun


We use solar energy to make our fleet greener, in every sense of the word. For instance, we use the power from our solar panels to charge our employees' electric cars and e-bikes. Furthermore, even the forklifts in our warehouses are charged with solar energy. The result is a great amount of kilometres with zero emissions.

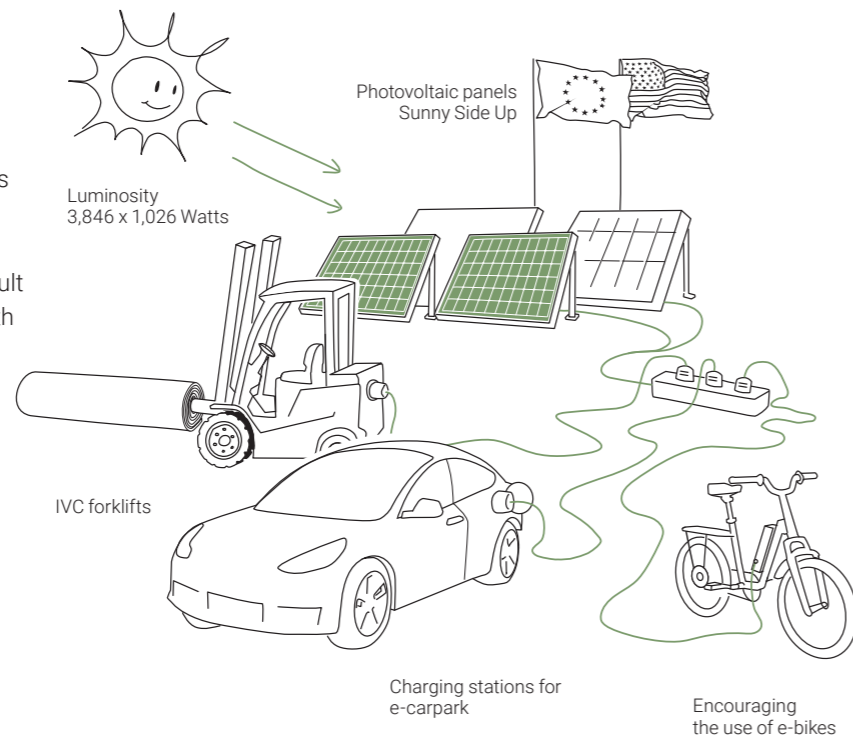

## Solar Panels


The **IVC Flooring Development Centre** in Waregem (Belgium) has been turned into a sustainable base. It uses heat recovery, intelligent lighting technology and is powered by solar panels on the building.

Solar panels contribute significantly to reducing our plants' carbon footprint. We installed more than 6,000 solar panels on the roof of our **Avelgem plant** generating 3,076 MWh per year.

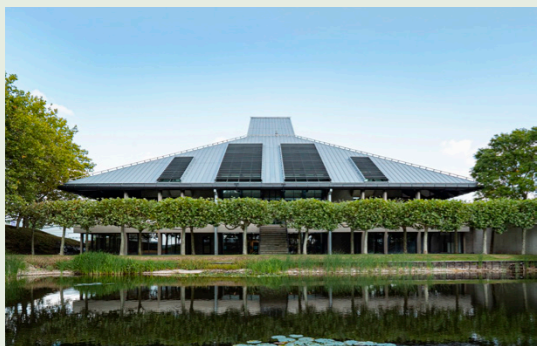


## Wind

In 2014, three wind turbines have been installed on the Avelgem production site. The turbines produce around 11,000 MWh of **renewable energy** each year. That's about as much as the yearly electricity consumption of 3,000 Flemish households. With this clean energy we power our own production facilities.

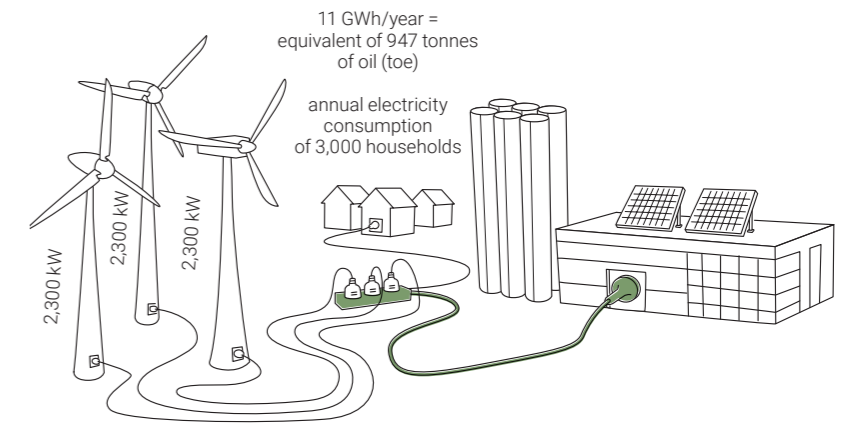

## Water

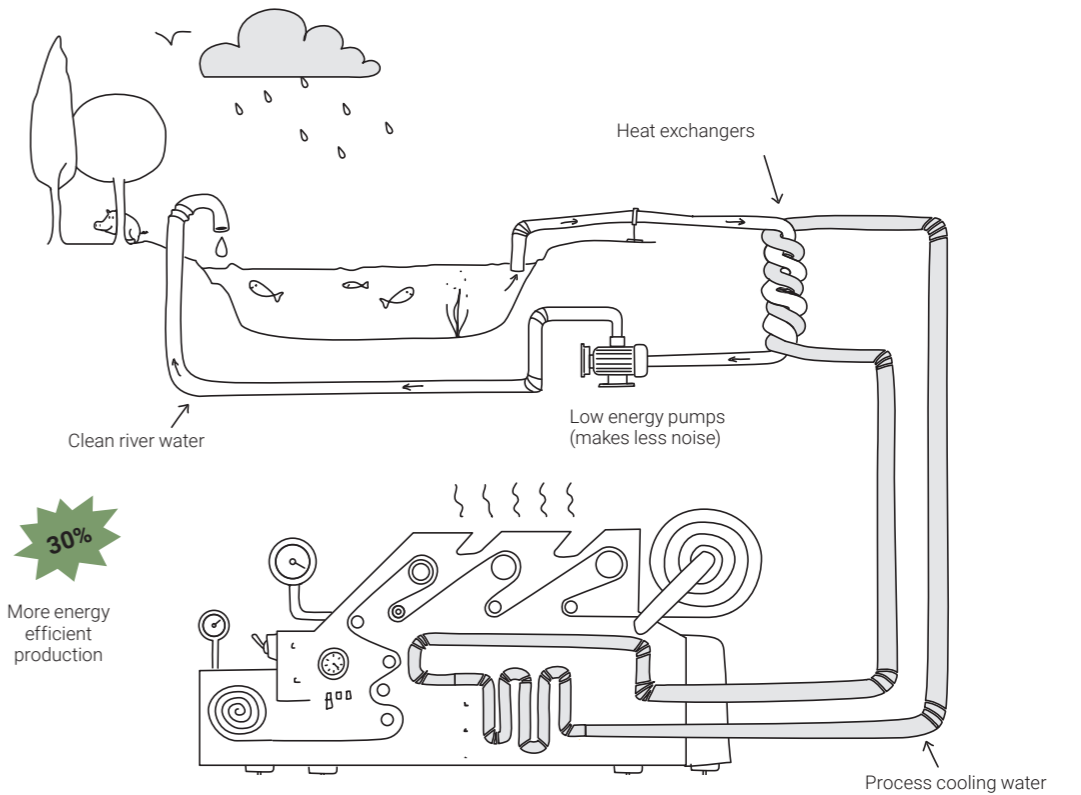

The manufacturing of vinyl floors requires cooling water to absorb heat in the different stages of production. IVC has invested in a bold experiment that uses surface water from the nearby **river Scheldt as a secondary coolant**. Using only a minimal amount of energy, river water is pumped up and sent along the closed loop flow of our

Avelgem plant's process cooling water. The exchange of thermal energy (up to 4,000 kW) is achieved through state-of-the-art heat exchangers, so there is no direct contact between the river water and the process water en route.


Using minimal electricity compared to other cooling systems, these innovations have resulted in a **30% increase of energy efficiency** in the overall production of vinyl floors. By eliminating the need for machine-driven refrigeration, we've also significantly **reduced on-site noise** and created better working conditions.

# Recover, A new life for floors

By using internally recycled materials in the composition of our floors, we use fewer new raw materials and work towards our goal of a fully circular product. We try to reduce our environmental impact not only by producing efficiently, but also by the way we use materials. Today all sheet vinyl production waste, and most of the sheet vinyl coming in via our Recover Take Back Program is being recycled and reused in the backing of LVT products.



## How we recover sheet vinyl

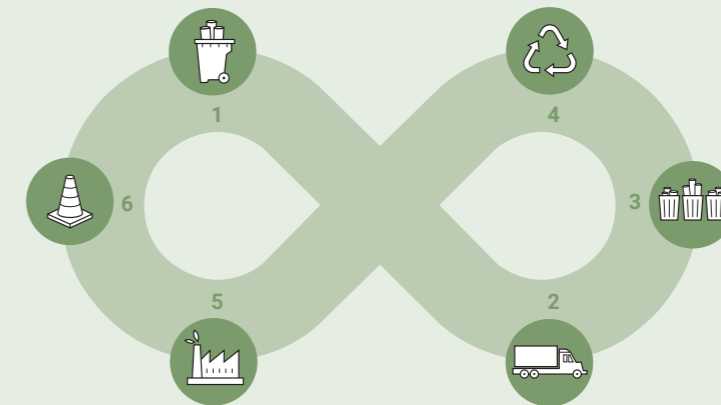

### 1. COLLECTING

After installation or at end-of-life, old floors and off-cuts are collected into bags or on pallets. The customer contacts us to arrange collection.

### 2. TRANSPORT

Depending on what we've collected, we bring the waste back to our recycling centres, or send it to one of our partners.

### 3. SORTING

Before the collected materials are ready for recycling, they need to be sorted and cleaned before being shredded.

### 4. RECYCLING

The process of converting waste into reusable material. At our recycling plant or external recycler. Used as raw material for new floorings. Material that's too contaminated or not REACH compliant is turned into raw material for road furniture.

### 5. NEW FLOORS

The recycled material is used as raw material for new LVT.

### 6. OTHER APPLICATIONS


Some post-consumer floors can't be recycled into new flooring because they're not REACH compliant. We then look for other applications, such as footwear, street furniture and outdoor tiles.

# Recover, A new life for floors

Reference cases of collecting sheet vinyl

## Aintree Race Course UNITED KINGDOM

At The Grand National Aintree, the most popular horse race in Britain, more than 3,000 m<sup>2</sup> of wood and vinyl went directly from the racecourse to the landfill each year. A huge waste after an event of only three days. Thanks to our Recover Take Back Program, all floor materials are now recycled, saving about 2.45 tonnes of CO<sub>2</sub>.

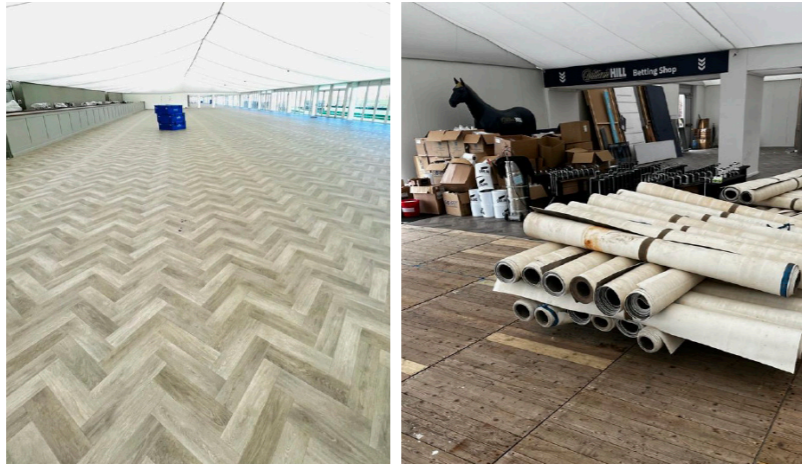

## Villages des Athlètes FRANCE

This temporary and circular village will provide an optimal welcome to the athletes of the world's most popular sporting event and become an eco-responsible neighbourhood after the games. A superior and versatile building project, and a perfect fit for our Batimax vinyl. With its innovative design, the floor is easy to install, remove and recycle. It's high performing, resistant to heavy use, flexible for reuse and long-lasting.



## Vaccination Centres BELGIUM

During the pandemic, the Belgian government set up vaccination centres in several public buildings, such as a 2,000 m<sup>2</sup> site in Bruges. To protect the original floors from damage during this temporary use, heterogeneous vinyl from IVC Commercial was installed loose-lay so it could be easily reclaimed and recycled afterwards through the Recover Take Back Program.




# Circular vinyl with ReVinylize




Our ultimate goal? A fully circular product. Using an innovative recycling technology, we aim to make **all layers of our sheet vinyl circular**. We're completely rethinking our products: how can we use recycled sheet vinyl in the development of new sheet vinyl? In order to do this, we're taking a two-pronged approach, centred on the **micronisation of sheet vinyl** on the one hand and the **recycling of plasticisers via innovative extraction technology** on the other hand.



Bloodbags - Gloves - Sheet vinyl

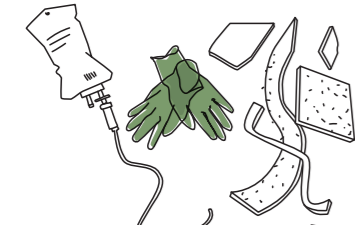

Shredding into particles

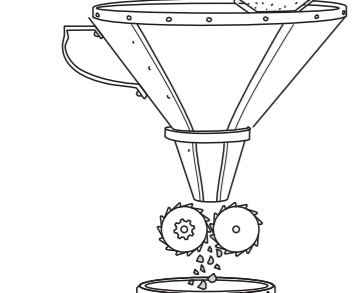


PVC flakes



Milling to recycled PVC powder

This groundbreaking technology, the first circular process in the industry, will result in up to 20% recycled sheet vinyl in future sheet vinyl products. Besides flooring, we will also recycle medical waste and other flexible PVC products.

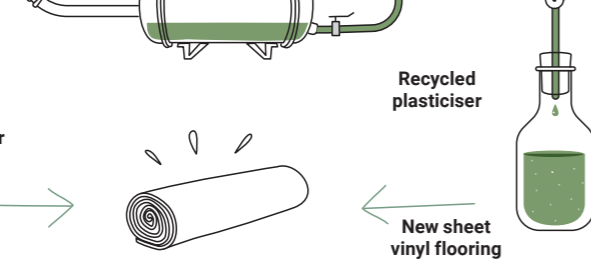

New sheet vinyl flooring

# Certifications for our sustainability journey

At IVC, we aim to add value to our customers' living spaces without compromising on health, comfort or sustainability. In order to do so, we rely on third party certifications to provide transparency in terms of environmental impact and safety of our products.

## Environmental Management

Since 1997 IVC has made substantial efforts towards a well and precisely tailored, fully integrated environmental management system. In 2012 we were awarded ISO 14001 certification, showcasing our commitment to environmental responsibility. This certification for ecological performances is a good reflection of our past efforts and current compliance with environmental rules and regulations.



## Member of the green industry

As a leader in flooring, we are member of a wide range of organisations that represent the industry. We are member of ERFMI (EU), FEB (DE), DGNB (DE) and Kaléi (FR). With both ERFMI and Kaléi we are working together to provide our customers collective Environmental Product Declarations (EPD) and Fiches de Déclaration Environnementale et Sanitaire (FDES), showing our industry efforts towards greener products. In Belgium, we are a member of the Fedustria and Voka employer organisations. Within these industry organisations, we consider it important to work together for a green industry.



## Quality Management

As part of our ISO 9001 certification we have implemented a quality management system, that enables us to comply with the strictest regulations. This demonstrates our ability to consistently provide products that meet customer and regulatory requirements.



## Ecotags

Together with temperature and humidity, air quality is one of the most important factors in interior environments. We want to make sure that our sheet vinyl flooring, that is often a central part of people's living spaces, contribute to healthy and safe living spaces and ensure that they don't pose any health risks to our end users. To do so we make sure that our finished products intended for interior use comply with some of the strictest indoor emission labels.

Additionally we only purchase and process raw materials that are in line with the REACH regulations and only work with suppliers who comply with these regulations. In this way we are able to guarantee the integrity and quality of the end product that we deliver to the end user.





## Get in touch

Want to learn more about IVC Commercial's flooring solutions, or need help tackling an exciting project? We've got you covered.

Go to [ivc-commercial.com](http://ivc-commercial.com) to browse our collections, order samples, download inspirational brochures or stop by one of our showrooms.

You can also make an appointment with our dedicated team by sending us an email via [info@ivc-commercial.com](mailto:info@ivc-commercial.com). Get in touch!

Follow us on     



## Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

<b>Flooring type</b> / Type de couverture - Type vloer - Fußbodenart	
<b>Heterogeneous PVC</b> / PVC hétérogène - Heterogene PVC - Heterogene PVC	
<b>Level of use</b> / Classe d'usage - Gebruiksklasse - Eignungsklasse	EN ISO 10874
<b>Total thickness</b> / Epaisseur totale - Totale dikte - Gesamtdicke	EN ISO 24346
<b>Wear layer</b> / Couche d'usure - Slijtlaag - Nutzschiicht	EN ISO 24340
<b>Wear layer PUR treatment</b> / Traitement polyuréthane - PUR slijtlaag behandeling - Schutz vor Schmutz PUR	
<b>Fonghi-bacterio static treatment</b> / Traitement fonghi-bactériostatique - Schimmel-bacteriewerende behandeling - Keimfreie Oberfläche	ISO846-A - ISO22196
<b>Total weight/m²</b> / Poids total/m² - Totaal gewicht/m² - Gewicht/m²	EN ISO 23997
<b>Width</b> / Largeur - Breedte - Breite	EN ISO 24341
<b>Standard Length</b> / Longueur standard - Standaard lengte - Standardlänge	EN ISO 24341
<b>Weight of standard roll</b> / Poids standard des rouleaux - Standaard rolgewicht - Standard-Rollengewicht	
<b>Inflammability</b> / Classement feu - Brandklasse - Brandverhalten	EN 13501
<b>Slip resistance</b> / Glissance - Antislip - Rutschfest	EN 13893
<b>Slip restraint</b> / Résistance au glissement - Slipweerstand - Rutschhemmung	EN 16165 Annex B
<b>Slip classification</b> / Résistance au glissement - Slipweerstand - Rutschhemmung	EN 13845
<b>Abrasion resistance test</b>	EN 13845
<b>RRL Pendulum test (Wet Test)</b>	RRL
<b>Residual indentation</b> / Poinçonnement rémanent - Restindruk - Eindrückverhalten	EN ISO 24343-1
<b>Furniture leg resistance</b> / Résistance au pied de meuble - Meubelpoottest - Möbelschubtest	EN ISO 16581
<b>Curling</b> / Incurvation - Krulling - Schüsselung	EN ISO 23999
<b>Electrical resistance</b> / Résistance électrique - Elektrische weerstand - Elektrischer Widerstand	EN 1081
<b>Static electrical propensity</b> / Accumulation de charges électrostatiques - Electrostatische Propensiteit - Elektrostatische Verhaltung	EN 1815
<b>Dimensional stability</b> / Stabilité dimensionnelle - Dimensionele stabiliteit - Massänderung - Massänderung	EN ISO 23999
<b>Thermal conductivity</b> / Conductivité thermique - Warmtedoorgangscoefficient - Wärmeleitfähigkeit	EN ISO 10456
<b>Heat insulation</b> / Isolation thermique - Thermische isolatie - Wärmedurchlasswiderstand	EN 12667
<b>Binder quantity in wear layer</b> / Taux de liant dans la couche d'usure - Hoeveelheid bindmiddel in slijtlaag - Bindemittelmengde in der Nutzschiicht	EN 12667
<b>Abrasion group</b> / Groupe d'abrasion - Slijtageweerstand - Verschleißverhalten	ISO 660-2
<b>Indoor air quality</b> / Qualité de l'air intérieur - Binnenmilieu - Raumluftqualität	
<b>Acoustic insulation</b> / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß	EN ISO 717-2
<b>Castor chair resistance</b> / Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhlrollenfestigkeit	EN ISO 4918
<b>Castor type</b> / Type de chaises à roulettes - Type stoelwielen - Stuhlrolle Typ	EN 12529
<b>Light fastness</b> / Résistance à la lumière - Lichtechtheid - Lichtechtheit	ISO 105-B02
<b>Underfloor heating</b> / Chauffage par le sol - Vloerverwarming - Bodenheizung	EN 12524
<b>Resistance to chemicals</b> / Résistance aux produits chimiques - Chemicaliënresistentie - Chemikalienbeständigkeit	EN ISO 26987
<b>Hot welding</b> / Soudage thermique - Warmlassen - Thermische Verschweißung	
<b>Cold welding</b> / Soudage à froid - Koud lassen - Kaltverschweißung	Invisiweld
<b>Warranty years</b> / Garantie ans - Garantie in jaren - Garantie Jahren	

The warranty covers manufacturing defects and premature wear in the event of normal use

La garantie couvre les vices de fabrication et l'usure précoce en usage normal / De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik.

Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung

Iperform 70	Tirreno 70	Tempo	Centra 70	Optimise 70	Silento 50
Compact Flooring	Compact Flooring	Compact Flooring	Compact Flooring	Acoustic Flooring	Acoustic Flooring
EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 26986	EN ISO 11638	EN ISO 11638
23 - 34 - 43	23 - 34 - 43	23 - 33	23 - 34 - 43	23 - 34 - 42	23 - 33
2,15 mm	2,00 mm	2,00 mm	2,00 mm	3,40 mm	3,00 mm
0,70 mm	0,70 mm	0,50 mm	0,70 mm	0,70 mm	0,50 mm
HyperGuard+	HyperGuard+	HyperGuard+	HyperGuard+	HyperGuard+	HyperGuard+
Sanitec	-	-	-	Sanitec	-
ca. 2.515 g	ca. 2.557 g	ca. 2.358 g	ca. 2.543 g	ca. 2.904 g	ca. 2.198 g
2-4 m	2-4 m	2-4 m	2-3-4 m	2 m	2-4 m
ca. 25 m	ca. 25 m	ca. 25 m	ca. 25 m	ca. 25 m	ca. 25 m
ca. 126 - 252 kg	ca. 130-260 kg	ca. 122-244 kg	ca. 131-262 kg	ca. 149 kg	ca. 114-228 kg
Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1 (fully glued)
DS	DS	DS	DS	DS	DS
R10	R10	R10	R10	R10	R9
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
norm ≤ 0,10 mm 0,05 mm	norm ≤ 0,10 mm 0,06 mm	norm ≤ 0,20 mm	norm ≤ 0,20 mm 0,05 mm	norm ≤ 0,20 mm 0,12 mm	norm ≤ 0,20 mm 0,16 mm
PASS	PASS	PASS	PASS	PASS	PASS
norm ≤ 8 mm 1,7 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm
1,4 x 10 <sup>9</sup> Ohm	6,78 x 10 <sup>7</sup> Ohm	1,74 x 10 <sup>9</sup> Ohm	≤ 10 <sup>9</sup> Ohm	1,1 x 10 <sup>9</sup> Ohm	1,32 x 10 <sup>9</sup> Ohm
≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)
norm ≤ 0,40% 0,03%	norm ≤ 0,40% <0,10%	norm ≤ 0,10%	norm ≤ 0,40% 0,05%	norm ≤ 0,40% 0,05%	norm ≤ 0,40% 0,05%
0,157 W/(m.K)	0,190 W/(m.K)	0,147 W/(m.K)	0,190 W/(m.K)	0,106 W/(m.K)	0,083 W/(m.K)
0,014 (m².K/W)	0,0101 m². K/W	0,0117 m². K/W	0,0101 m². K/W	0,0319 m². K/W	0,336 m². K/W
Type I	Type I	Type I	Type I	Type I	Type I
Class T	Class T	Class T	Class T	Class T	Class T
LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC
ΔLw 7 dB	ΔLw 7 dB	ΔLw 8 dB	ΔLw 7 dB	ΔLw 19 dB	ΔLw 18 dB
Pass	Pass	Pass	Pass	Pass	Pass
Type W	Type W	Type W	Type W	Type W	Type W
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C
Very good	Very good	Very good	Very good	Very good	Very good
Available	Available	Available	Available	Available	Available
Suitable	Suitable	Suitable	Suitable	Suitable	Suitable
15	7	12	7	12	7

\* Tested glued on concrete.

\* Tested on concrete subfloor (Cfl-S1 on wood).

\* Tested on concrete subfloor (Cfl-S1 on wood).



Batitec	Batimax Plus	Nomad	Logitex Ultimate 55	Isafe 70
Acoustic Flooring	Acoustic Flooring	Loose Lay Flooring	Textile Backing	Safety Flooring
EN ISO 11638	EN ISO 11638	ISO 11638	EN 650	ISO 10582 EN 13845
23 - 31	23 - 33 - 42	23 - 32	23 - 33 - 42	34 - 43
2,75 mm	3,20 mm	3,90 mm	3,20 mm	2,00 mm
0,35 mm	0,53 mm	0,45 mm	0,55 mm	0,70 mm
HyperGuard+	HyperGuard+	HyperGuard+	HyperGuard+	HyperGrip
-	-	-	-	Sanitec
1.830 g	2.202 g	ca. 2.850 g	ca. 2.124 g	ca. 2.850 g
2-3*-4 m	2 m	2-4 m	2-4 m	2 m
ca. 25 m	ca. 25 m	ca. 20 m	ca. 25 m	ca. 20 m
ca. 92 - 138 - 184 kg	ca. 110 kg	ca. 116-232 kg	ca. 102-204 kg	ca. 118 kg
Bfl-S1	Bfl-S1	Bfl-S1	Cfl-S1	Bfl-S1*
DS	DS	DS	DS	DS
R10	R10	R10	R11	R12
-	-	-	-	Class ESf - ESb
-	-	-	-	< 10% particles lost over 50.000 Cycles
-	-	-	-	36+ Low slip risk potential
norm ≤ 0,20 mm 0,12 mm	norm ≤ 0,20 mm 0,14 mm	≤ 0,20 mm	norm ≤ 0,20 mm	0,04 mm (norm ≤ 0,10 mm )
PASS	PASS	PASS	PASS	Very good
≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm
1,30 x 10 <sup>8</sup> Ohm	1,54 x 10 <sup>8</sup> Ohm	1,64 x 10 <sup>8</sup> Ohm	7,8 x 10 <sup>8</sup> Ohm	6,4 x 10 <sup>8</sup> Ohm
≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	0,4 kV (antistatic)	≤ 2kV (antistatic)
norm ≤ 0,40% 0,05%	norm ≤ 0,40%	norm ≤ 0,40% 0,05%	norm ≤ 0,40% 0,10%	norm ≤ 0,40% < 0,10%
0,080 W/(m.K)	0,0787 W/(m.K)	0,091 W/(m.K)	0,070 W/(m.K)	0,164 W/(m.K)
0,037 m <sup>2</sup> . K/W	0,0387 m <sup>2</sup> . K/W	0,0422 m <sup>2</sup> . K/W	0,0449 m <sup>2</sup> . K/W	0,0134 (m <sup>2</sup> .K/W)
Type I	Type I	Type I	Type I	Type I
Class T	Class T	Class T	Class T	Class T
LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC
ΔLw 20 dB	ΔLw 20 dB	ΔLw 20 dB	ΔLw 19 dB	ΔLw 5 dB
Pass	Pass	Pass	Pass	Pass
Type W	Type W	Type W	Type W	Type W
≥ 6	≥ 6	≥ 6	6	≥ 6
Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C
Very good	Very good	Very good	Very good	Very good
Available	Available	Available	Available	Available
Suitable	Suitable	Suitable	Suitable	Suitable
12	12	12	12	12

\* Tested on concrete subfloor (Cfl-S1 on wood).



# Welcome to our showroom!

Discover our collections & technical features in our showroom at FLDC Waregem, Belgium.

Combine your visit with a factory tour at our Sheet vinyl plant in Avelgem.

Contact your sales representative for a visit!



## General notice

IVC reserves the right to change or amend any written information without notice. Ensure the latest information is being consulted by referring to the website.

With regard to colour printing of the photographic images, it is only possible to give a provisional representation of the colour.

The samples in this presentation are only cuttings of the respective products and show only a small part of the overall design and colour. To appreciate how the full design, including plank width and length, will impact on an interior, please visit our website.

As with all Heterogeneous Vinyl floors, direct contact with rubber shoes, mats or caps

(used for chair and furniture legs) will cause discolouration, so such damage is excluded from the guarantee.

